

Owl Talon Torrent™

1U Data Diode

Low Latency, High-Speed One-Way Transfer Up to 50Gbps



Key Features

- Secure, hardware-enforced, one-way data transfers
- Transfer multiple high-speed simultaneous data types and protocols via 16 independent channels on a single device
- Compatible with Owl Talon software platform for easy-to-use, web-based user interface
- Long-lasting, set-and-forget reliability
- Protocol Filtering Diode per NSA definition
- Up to 10 or 50 Gbps max throughput
- Advanced security features including SELinux enforcement, STIG-compliant OS, BIOS password, and disk encryption

Owl Talon™ Torrent: Next-Gen High Speed Data Diode

Building on a quarter century of one-way networking expertise and customer feedback, the Owl Talon Torrent is the latest, revolutionized data diode series Owl's portfolio, representing the pinnacle of performance in data diode technology. With an all-new FPGA-based protocol filtering diode (PFD) architecture designed for low latency, ultra-high data transfer requirements, Owl Talon Torrent data diodes are capable of file transfer at up to 100 Gbps.

Owl Talon™ Torrent 1U


The **Owl Talon Torrent 1U Data Diode** is a highly integrated, all-in-one, 19" rack-mountable appliance that leverages the Supermicro Twin SuperServer hardware platform, Owl Talon software platform, and Owl Talon Torrent data diode card kit to provide secure, high speed one-way data transfers at up to 50 Gbps. With an extensible foundation to support a variety of OT and IT protocols and applications, the Owl Talon Torrent 1U Data Diode enables a broad range of one-way data transfer use cases at ultra high-speeds.



Unmatched Ease of Use

Featuring a modern, web-based user interface, the Owl Talon software platform is extremely easy to use. In just minutes, you can configure your data flows from source to destination, getting you up and running faster than ever before.

Owl Talon User Interface

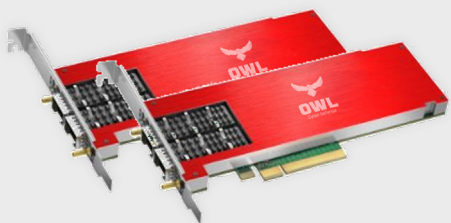

Owl Talon Torrent Data Diode Card Kit

The Owl Talon Torrent Data Diode Card Kit is comprised of two commercial PCIe network interface cards (one send, one receive) connected via a one-way-only fiber optic cable (for transfer between cards). Each individual card is installed on a separate host server within the 1U chassis envelope. The Owl Talon Torrent Data Diode Card Kit facilitates high bandwidth, low latency one-way transfer at up to 100 Gbps.

Technical Specifications

Supermicro Twin SuperServer SYS-120TP-DTTR

Case

19" 1U Rackmount Chassis

Dimensions

Height:

1.7 inches (43 mm)

Width:

17.25 inches (438 mm)

Depth:

28.25 inches (718 mm)

Security

Hardware:

Trusted Platform Module (TPM) 2.0

Silicon Root of Trust (RoT) – NIST

800-193 Compliant

Features:

Cryptographically Signed Firmware

Secure Boot

Secure Firmware Updates

Automatic Firmware Recovery

System Lockdown

16 independent channels that automatically adapt to overall bandwidth requirements

Operating Environment

Environmental Specs

Operating Temperature: 10°C to 35°C
(50°F to 95°F)

Non-operating Temperature: -40°C to 60°C
(-40°F to 140°F)

Operating Relative Humidity: 8% to 90%
(non-condensing)

Non-operating Relative Humidity: 5% to 95%
(non-condensing)

Approvals/Certifications

Pending regulatory
certification exercises

Supported Protocols:

→ File Transfer

→ TCP

→ UDP (unicast, multicast, broadcast)

→ NTP

→ Syslog

→ SMTP (email)

→ SNMP Traps

→ OPC DA/A&E

→ AVEVA PI Transfer

→ Remote Desktop

→ Remote Screen View



Owl Cyber Defense Solutions, LLC leads the world in data diode and cross domain network cybersecurity. With a constant focus on customers in the military, government, critical infrastructure, and commercial communities, Owl develops market-first, one-way data transfer products to meet a variety of operational needs, from entry level to enterprise.

For more information on Owl, or to schedule a demo, visit www.owlcyberdefense.com

